



Network Management & Monitoring

**Observium: all in one network
graphing and monitoring**



These materials are licensed under the Creative Commons *Attribution-Noncommercial 3.0 Unported* license
(<http://creativecommons.org/licenses/by-nc/3.0/>)

Observium

- Autodiscovering SNMP based network monitoring tool
- Written in PHP (web application)
- Includes support for a wide range of network hardware and operating systems including:
 - Cisco, Linux, FreeBSD, Juniper, Brocade, Foundry, HP and many more.
 - See http://www.observium.org/wiki/Supported_Devices

Available metrics

- CPU, Memory and Storage statistics.
- Interface traffic, packet and detailed error statistics.
- Temperature, Fan Speed, Voltage, Amperage, Power, Humidity and Frequency sensors.
- Users, Processes, Load Average and Uptime statistics.


Available metrics

- Linux distribution detection.
- Real-time interface traffic graphing.
- Device inventory collection (very useful!)
- Detailed IPv4, IPv6, TCP and UDP stack statistics.
- BGP and OSPF statistics.
- MAC / IP

Features

- Concept of enabled vs ignored
- Many already supported devices
- Host monitoring well supported using check_mk and support scripts
- Application monitoring, using SNMP
- Billing module
- Integration with other tools:
- Smokeping integration, collectd as well
- Syslog integration (receive logs from devices)

Architecture

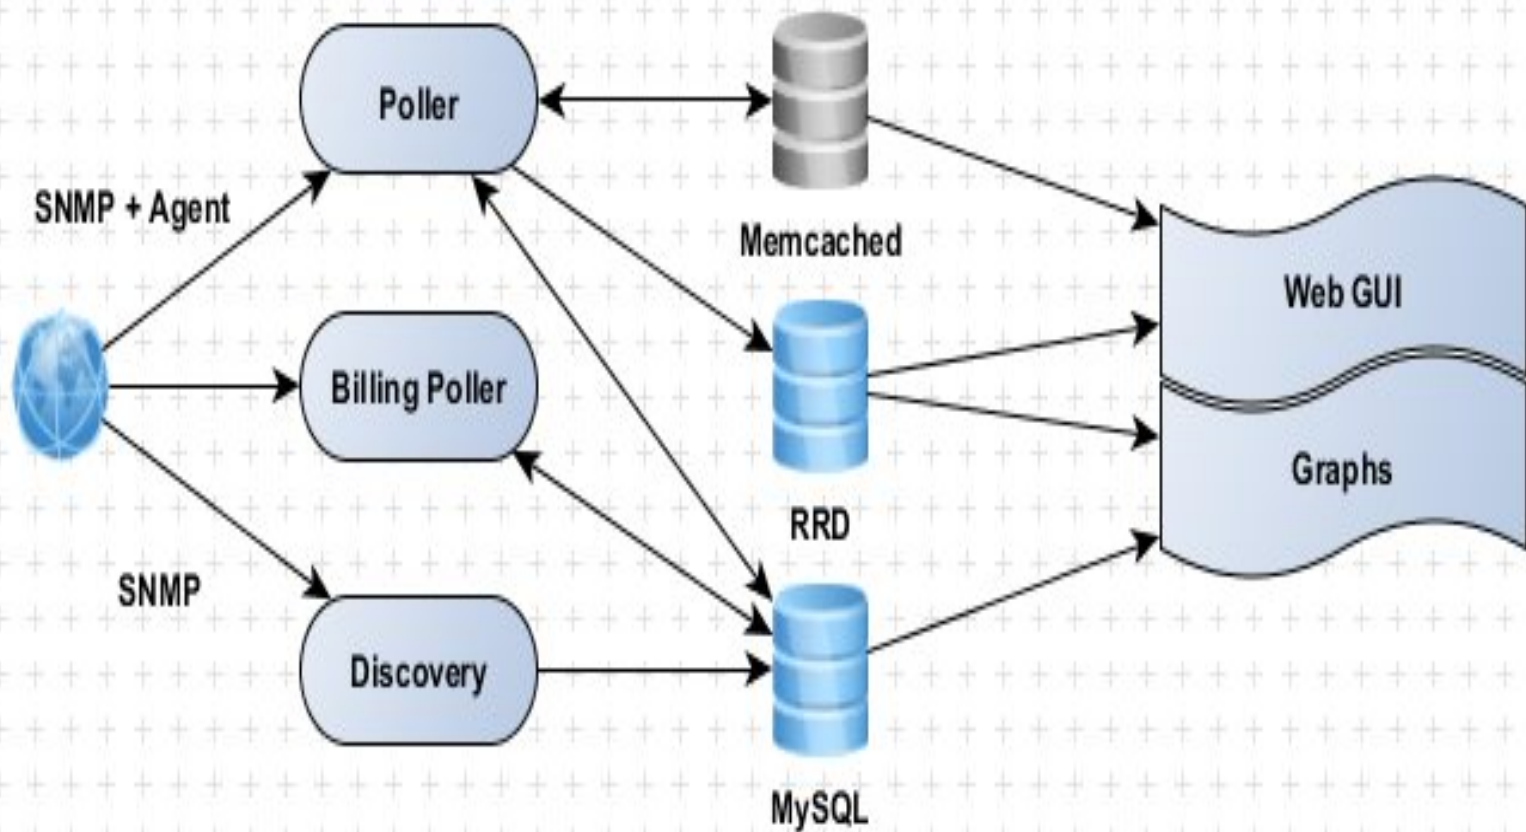

Availability

- Open source
- http://www.observium.org/wiki/Main_Page

Linux alpha.memetic.org 2.6.32-22-server #36-Ubuntu SMP Thu Jan 3
20:38:33 UTC 2010 x86_64

Hardware Generic x86 64-bit
Operating System Linux 2.6.32-22-server (Ubuntu 10.04)
Contact Adam Armstrong <adama@memetic.org>
Location Ovh, Paris, France
Uptime 23 days, 10h 6m 52s



43 20 1 22

lo, eth0, eth1, virbr1, virbr0, cisco0, vnet0, vnet4, vnet1, vnet2, vnet3

Services

5 5 0 0

dns, http, imap, pop, ssh

Processors

Intel Core i7 920 @ 2.67GHz		31%
Intel Core i7 920 @ 2.67GHz		39%
Intel Core i7 920 @ 2.67GHz		36%
Intel Core i7 920 @ 2.67GHz		11%
Intel Core i7 920 @ 2.67GHz		26%
Intel Core i7 920 @ 2.67GHz		25%
Intel Core i7 920 @ 2.67GHz		16%
Intel Core i7 920 @ 2.67GHz		21%

Memory Pools

Physical memory		7.69GB / 7.81GB 98.45%
Virtual memory		8.33GB / 39.05GB 21.33%
Swap space		660.35MB / 31.24GB 2.06%

Storage

/		35.71GB / 38.75GB 92%
/home		30.95GB / 38.45GB 81%
/mnt		1.55TB / 1.69TB 92%

Recent Events

29/Jun/10 13:55:01 cisco0 ifName: vnet5 -> cisco0



Devices : 17 (12 up 3 down 2 ignored 2 disabled)

Ports : 140 (89 up 3 down 5 ignored 42 shutdown)

[Overview](#) [Devices](#) [Services](#) [Locations](#) [Ports](#) [Health](#) [BGP Sessions](#) [System](#)
cisco0.vm
Belly of Alpha

[Overview](#) [Graphs](#) [Health](#) [Ports](#) [BGP](#) [Map](#) [Inventory](#) [Events](#) [Syslog](#) [Config](#) [Settings](#)

Cisco IOS Software, 7200 Software (C7200-ADVIPSERVICESK9-M), Version 12.2(33)SRD2, RELEASE SOFTWARE (fc2) Technical Support:
http://www.cisco.com/techsupport Copyright (c) 1986-2009 by Cisco Systems, Inc. Compiled Wed 20-May-09 20:57 by prod_rel_team

Hardware CISCO7206VXR
Operating System Cisco IOS 12.2(33)SRD2 (ADVIPSERVICESK9)
Location Belly of Alpha
Uptime 15 days, 16m 15s



16 7 0 9

Fa0/0, **Fa1/0**, **Fa1/1**, **E12/0**, E12/1, E12/3, E12/2, E12/4, E12/5, E12/6, E12/7, **Fa3/0**,
Fa3/1, **Nu10**, **Lo0**, **Lo100**

Recent Syslog

14/Jul/10 14:07:58 **CLNS-3-BADPACKET** : ISIS: L2 CSNP, packet (64769) or wire (115) length invalid from ca01.3979.001c (FastEthernet1/0)
14/Jul/10 14:07:36 **CLNS-5-ADJCHANGE** : ISIS: Adjacency to 0110.0000.0001 (FastEthernet1/0) Down, hold time expired

Processors

NPE400 0 10%

Memory Pools

7200VXR NPE-400 - I/O 5.38MB / 16MB 33.66%

7200VXR NPE-400 - Processor 40.02MB / 151.46MB 26.42%

7200VXR NPE-400 - Transient 91.5KB / 16MB 0.56%

Temperatures

I/O Cont Inlet 22°C **NPE Inlet** 22°C

I/O Cont Outlet 22°C **NPE Outlet** 22°C

Recent Events

04/Jul/10 20:07:14 **Loopback100** ifName: Tu0 -> Lo100
04/Jul/10 20:07:14 **Loopback100** ifDescr: Tunnel0 -> Loopback100
04/Jul/10 20:07:14 **Loopback100** ifAlias: -> Cust: Memetic (Loopback fake)
04/Jul/10 20:07:14 **Loopback100** ifMtu: 17883 -> 1514
04/Jul/10 20:07:14 **Loopback100** ifSpeed: 100000 -> 4294967295
04/Jul/10 20:07:14 **Loopback100** ifHighSpeed: 0 -> 8000
04/Jul/10 20:07:14 **Loopback100** ifType: tunnel -> softwareLoopback
04/Jul/10 20:07:14 **Loopback100** type: -> Cust
04/Jul/10 20:07:14 **Loopback100** descr: -> Memetic
04/Jul/10 20:07:14 **Loopback100** notes: -> Loopback fake



Devices : 75 (71 up 0 down 4 ignored 4 disabled)

Ports : 4078 (1723 up 567 down 255 ignored 1508 shutdown)

Overview Devices Services Locations Ports Health BGP Sessions System

uk.thn.pbr01
Telehouse North, London, UK

Overview Graphs Health Ports VRFs BGP Map Inventory Events Syslog Config Settings

3. GigabitEthernet0/0/2

Peering: LINX 224

195.66.224.180/23

2001:7f8:4::21e9:1/64



367.37Mbps

1 Gbps

Ethernet

0:23:4:a7:7a:2



MTU 1500

80.55Mbps


54.95Kpps

43.24Kpps

Graphs | ARP Table | Mac Accounting : Bits (Mini) | Top10 | Packets (Mini)

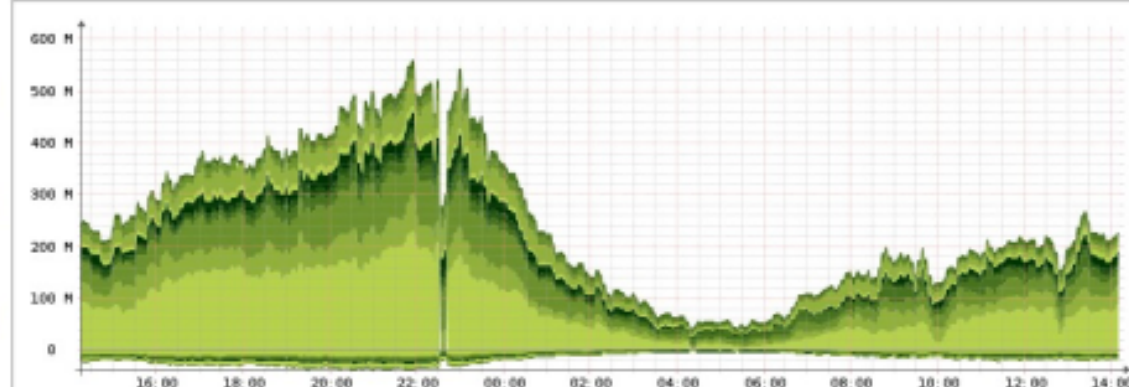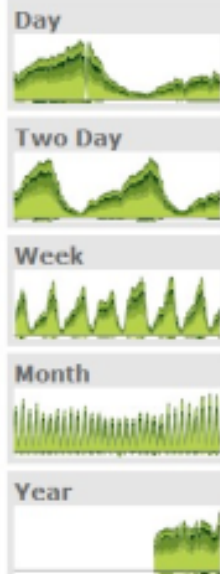

	In:	Current	Maximum	Total	Out:	Current	Maximum	Total
195.66.224.125 (00:19:e2:bf:e7:c4)		87.08Mbps	230.75Mbps	7.36TB		7.52Mbps	13.06Mbps	575.74GB
195.66.224.168 (00:24:dc:8e:e4:01)		38.04Mbps	71.08Mbps	2.51TB		1.40Mbps	2.60Mbps	97.56GB
195.66.224.133 (00:0c:db:e8:57:09)		25.59Mbps	98.77Mbps	3.51TB		1.75Mbps	4.57Mbps	194.06GB
195.66.224.140 (00:19:07:ab:ec:c0)		11.15Mbps	43.41Mbps	1.38TB		1.16Mbps	5.44Mbps	156.57GB
195.66.224.46 (00:18:74:2e:1b:c0)		11.89Mbps	21.76Mbps	698.90GB		2.10Mbps	3.84Mbps	139.90GB
195.66.225.56 (00:1f:ca:4f:73:80)		14.17Mbps	39.23Mbps	1.19TB		877.28kbps	1.91Mbps	79.25GB
195.66.224.43 (00:21:e0:3a:3a:02)		10.11Mbps	16.59Mbps	662.79GB		4.59Mbps	8.28Mbps	355.62GB
195.66.224.243 (00:1a:30:29:89:c0)		9.71Mbps	70.80Mbps	2.04TB		727.43kbps	4.99Mbps	87.92GB
195.66.225.100 (00:1e:f7:47:cd:84)		9.06Mbps	27.56Mbps	949.74GB		13.34 bps	14.33 bps	897.38kB
195.66.224.227 (00:12:f2:3e:e4:01)		8.98Mbps	27.88Mbps	925.59GB		461.89kbps	1.31Mbps	49.05GB

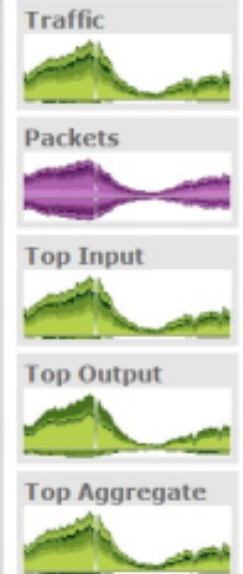



Devices : 17 (12 up 3 down 2 ignored 2 disabled)

Ports : 140 (89 up 3 down 5 ignored 42 shutdown)

[Overview](#)
[Devices](#)
[Services](#)
[Locations](#)
[Ports](#)
[Health](#)
[BGP Sessions](#)
[System](#)
cisco1.vm
 Belly of Alpha

[Overview](#)
[Graphs](#)
[Health](#)
[Ports](#)
[VRFs](#)
[BGP](#)
[Map](#)
[Inventory](#)
[Events](#)
[Syslog](#)
[Config](#)
[Settings](#)
☐ Expand All Nodes
 ☐ Collapse All Nodes

CISCO7206VXR (Chassis)

Cisco 7206VXR, 6-slot chassis

Serial No. 4294967295

1. I/O and CPU Slot 0

I/O and Processor Slot Container

1. NPE-400 (NPE400 0)

Cisco 7200VXR Network Processing Engine NPE-400

Serial No. 11111111

2. C7200-IO-FE-MII/RJ45 (module 0)

I/O FastEthernet (TX-ISL)

Serial No. 4294967295

- 1. FastEthernet0/0

DEC21140

- 1. I/O Cont Inlet Temperature 0 ()

I/O Cont Inlet Temperature Sensor

- 2. I/O Cont Outlet Temperature 0 ()

I/O Cont Outlet Temperature Sensor

1. Flash Card Slot Container I/O 0

Flash Card Slot Container I/O

2. PA Slot 1

PA Slot Container

3. PA Slot 2

PA Slot Container

1. PA-2FE-FX (module 2)

Dual Port FastEthernet (RJ45)

Serial No. XXX000000000

4. PA Slot 3

PA Slot Container

5. PA Slot 4




PA Slot Container

3. FastEthernet1/1

Cust: Memetic [100MbK] {CUST001} (BGP

Partial)

172.16.0.2/24

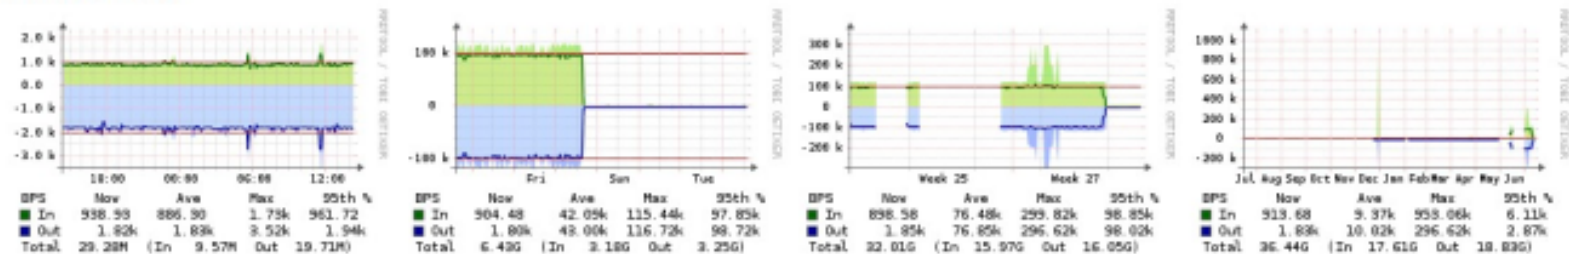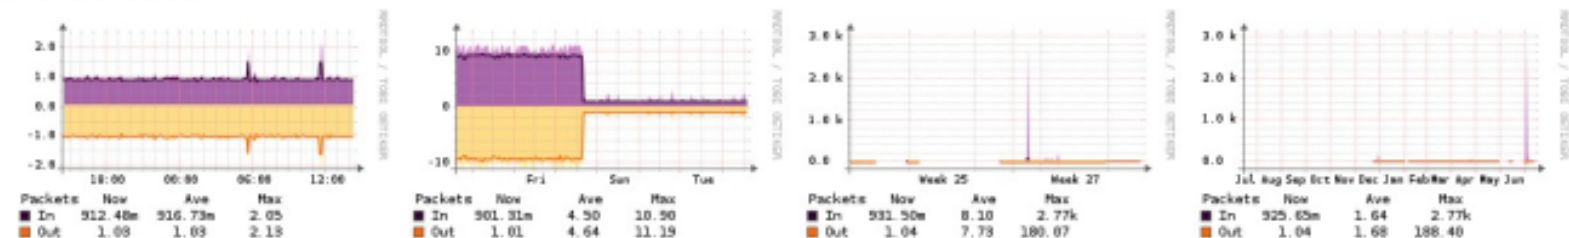
[Graphs](#) | [ARP Table](#) | [Mac Accounting : Bits \(Mini|Top10\)](#) | [Packets \(Mini\)](#)
Interface Traffic**Interface Packets****Interface Non Unicast**

Questions?