

# Virtualization and Performance

Network Startup Resource Center  
[www.nsrc.org](http://www.nsrc.org)



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license  
(<http://creativecommons.org/licenses/by-nc/4.0/>)

# Overhead of full emulation

- Software takes many steps to do what the hardware would do in one step
- So pure emulation (e.g. QEMU) is slow
  - although much clever optimization is done
- One obvious choice: if the CPU of the guest is the same type as the CPU of the host, we would prefer the CPU to run the code directly
- But we must also intercept those points where hardware is accessed

# Hardware support

- CPU vendors have added support to make virtualization more efficient
  - Intel call it "VT-x", AMD call it "AMD-V"
- Needs support from both the CPU and motherboard
  - you may need to enable it in the BIOS settings
- Most hypervisors work better when this is available
- Some hypervisors won't work without it (KVM)

# Paravirtualization

- Guest OS is modified to be aware of the hypervisor and communicate with it
- Especially reduces the overhead of virtual disk and virtual network access
  - can also add features like "balloon memory"
- Examples:
  - Xen
  - virtio (add-on for disk and network PV)
- You are limited to guests OSes with PV support

# virtio is easy to set up


- Simply configure your hypervisor to use virtio NICs and/or virtio disk interfaces for the guest(s) you wish to speed up
- If the guest supports it, it will boot just fine
- A free ISO of signed Windows drivers is available from Red Hat
  - includes disk, network and balloon memory drivers
- Some things may appear differently
  - e.g. in Linux you may see /dev/vda instead of /dev/sda

# Containers (OS level virtualization)


- Forget hardware emulation completely
- Single OS, single running kernel
- Kernel modified to provide separate filesystems, network stacks, PIDs etc
- Examples:
  - Linux: LXC, OpenVZ, Vserver, Docker
  - FreeBSD: Jails
  - Solaris: Zones
- Very efficient, but less isolation



# Containers

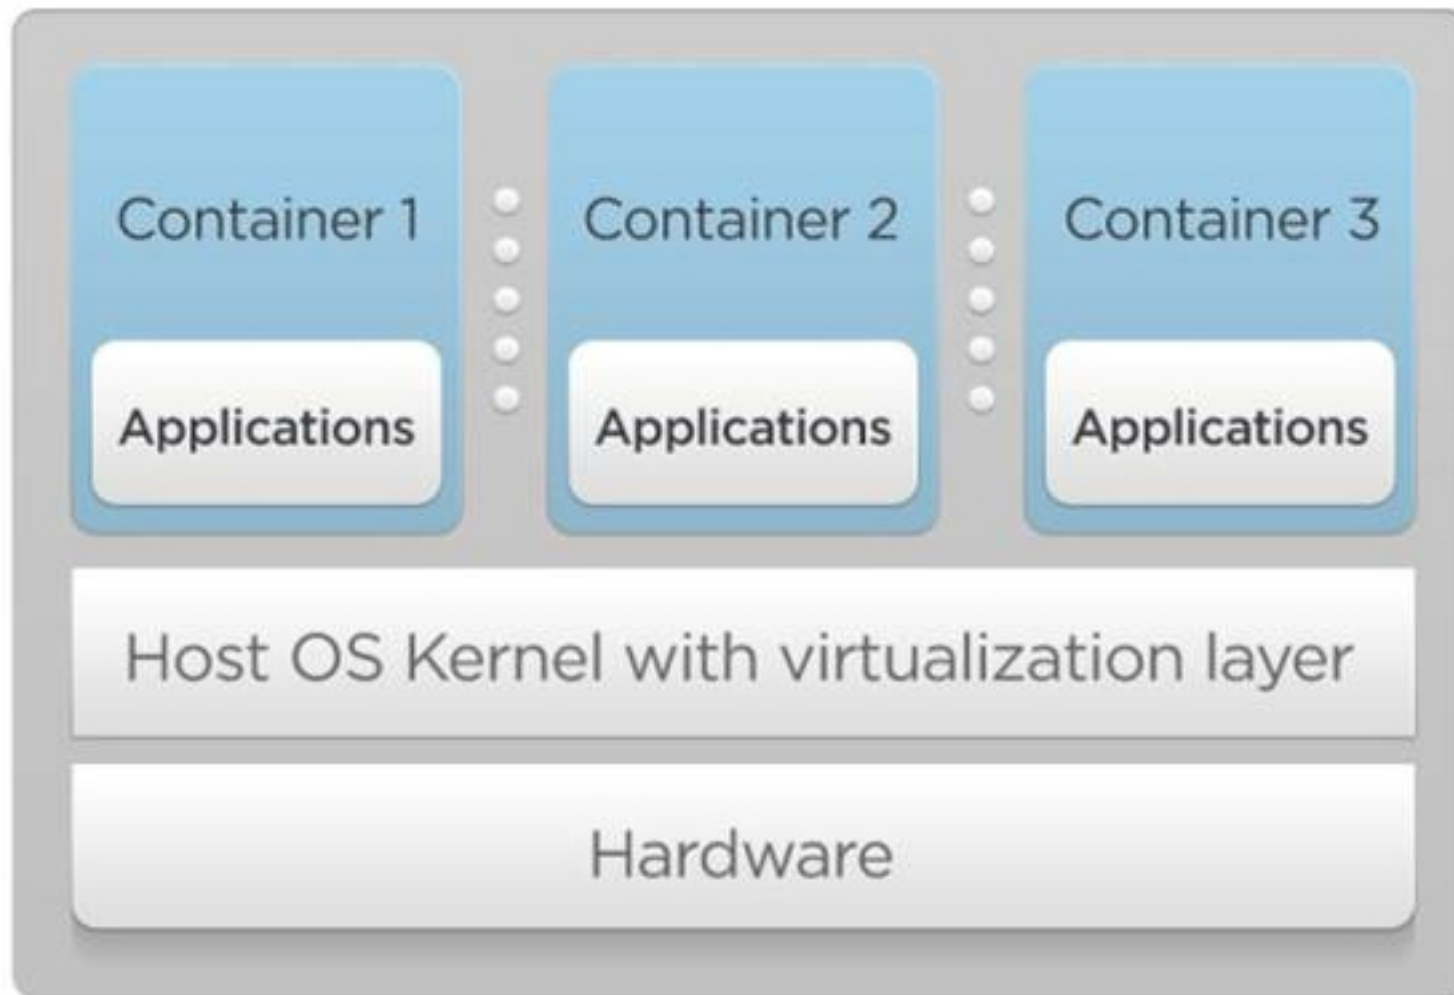


# Virtualization vs. Containers

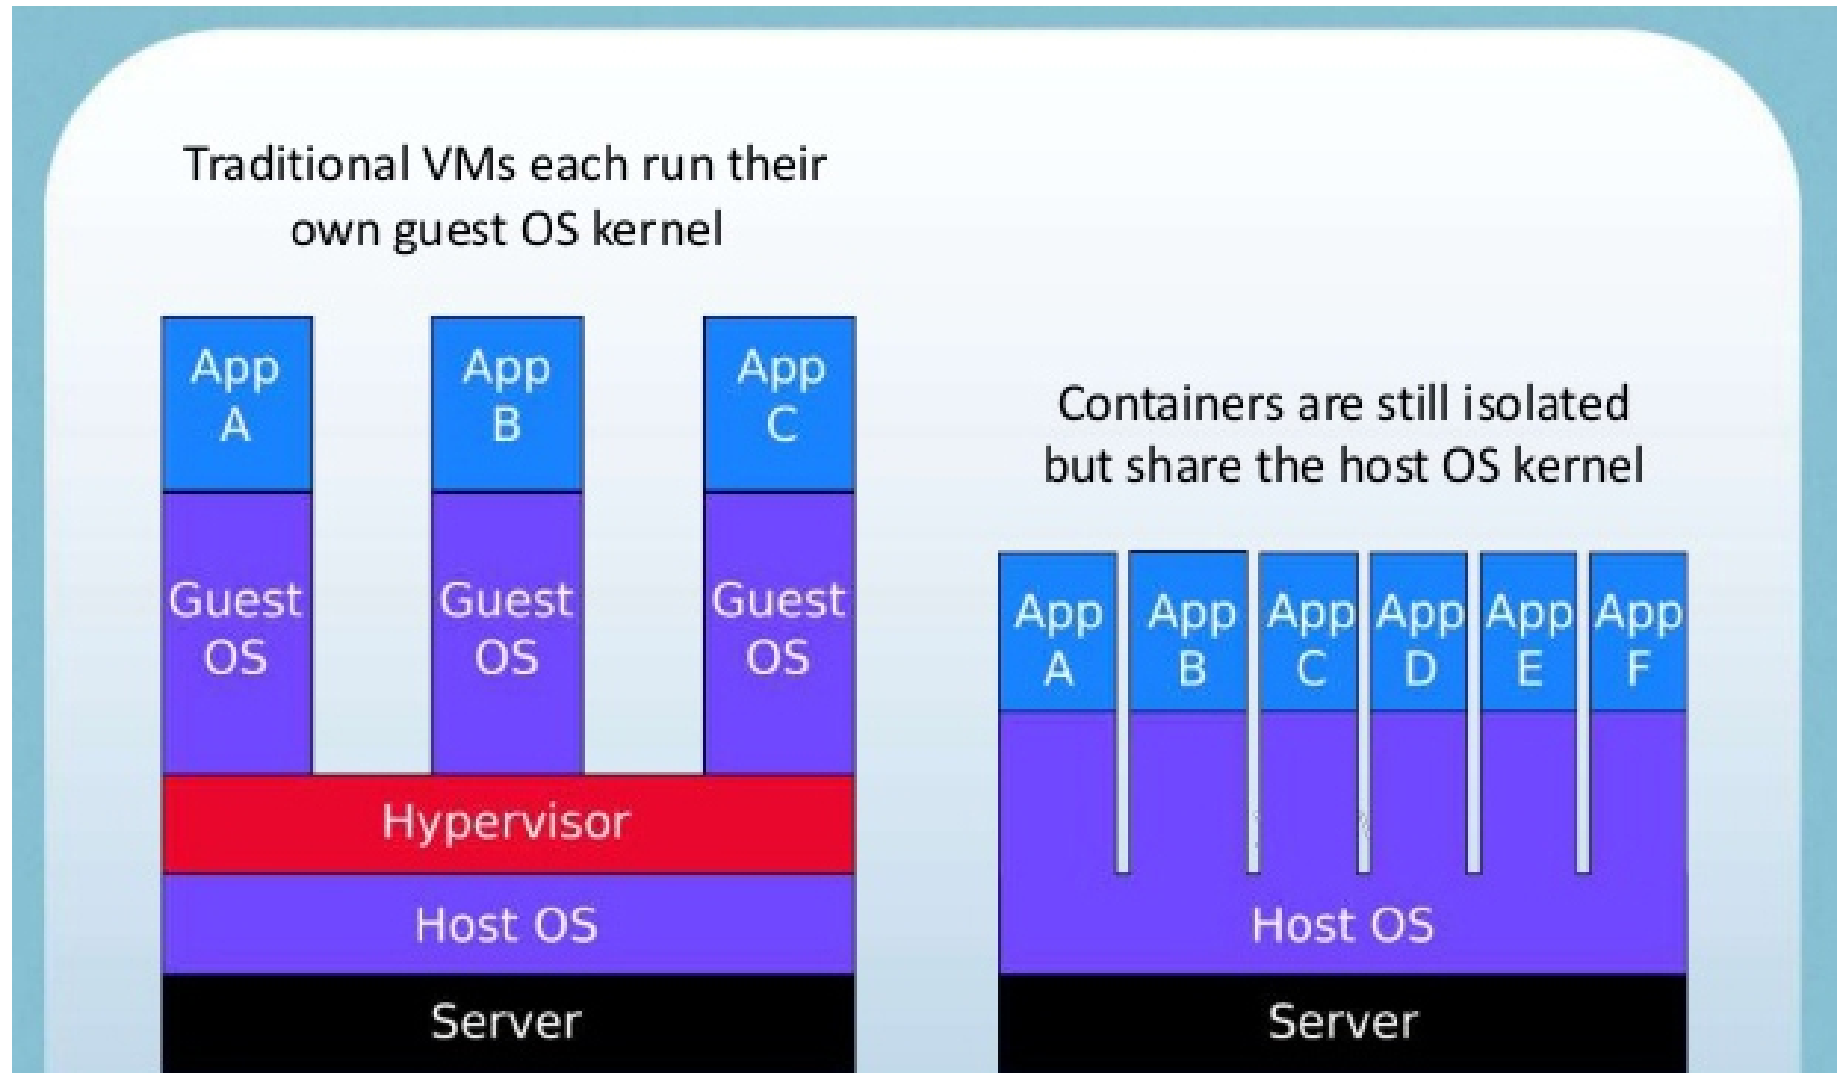



# Comparison

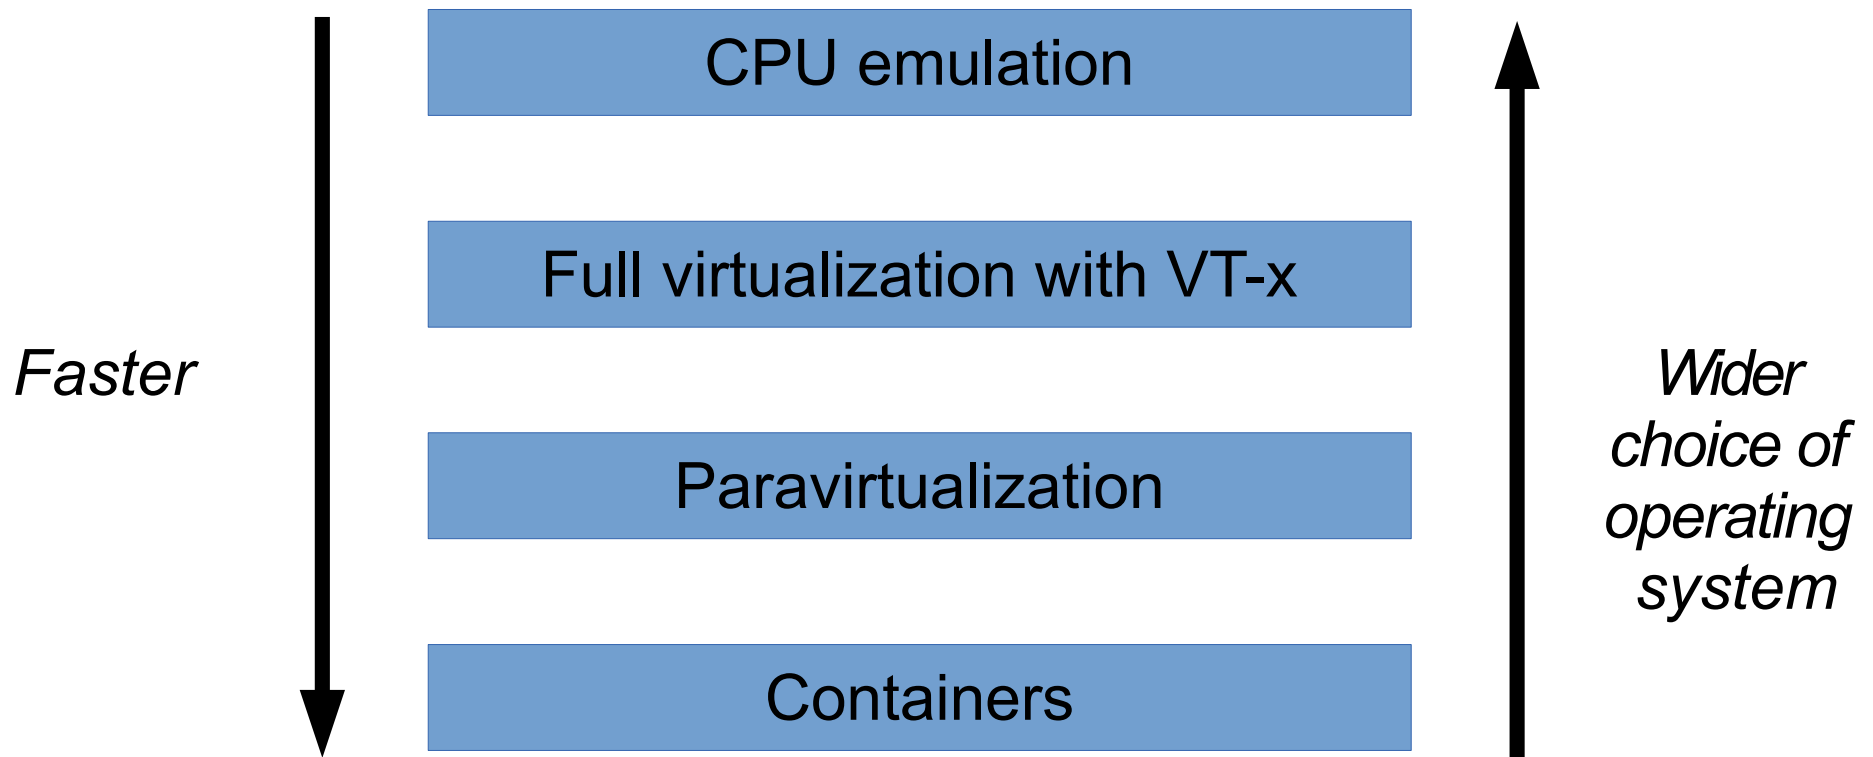

# Limitations of the host hardware

- Virtualization doesn't magically make your hardware work faster!
- You will be increasing the load on your hardware by running multiple VMs
- Often the major bottleneck is disk I/O

# Disk limitations

- A hard drive is "spinning rust"
- By far the slowest part of the computer
  - Time to seek head is typically 3-8ms
  - 7200rpm drive = 120 revs per second = 8.3ms/rev
  - Typical 100MB/s transfer rate = 10ms per megabyte
  - Data transfer will require seeking the head, then (average) half a revolution, then the transfer
  - Expect only 100-200 operations per second!
- Many small transfers much worse than few large transfers


# Increasing disk performance

- Buy faster hard drives (e.g. 15K RPM)
- Install multiple hard drives
  - They can be independently seeking to different data
  - Allows more concurrent accesses
    - 99.999% drive array reliability → <http://goo.gl/TCr1lw>
- Use SSD
  - More expensive
  - Shorter lifespan
  - Improving

# Beware parity RAID

- A single write on RAID5/6 requires multiple reads, parity calculation and multiple writes
- Don't use RAID5/6 if you care about write performance!
  - RAID5 and error rates with large data stores == lost data


## RAID 5 (Drives with Parity)

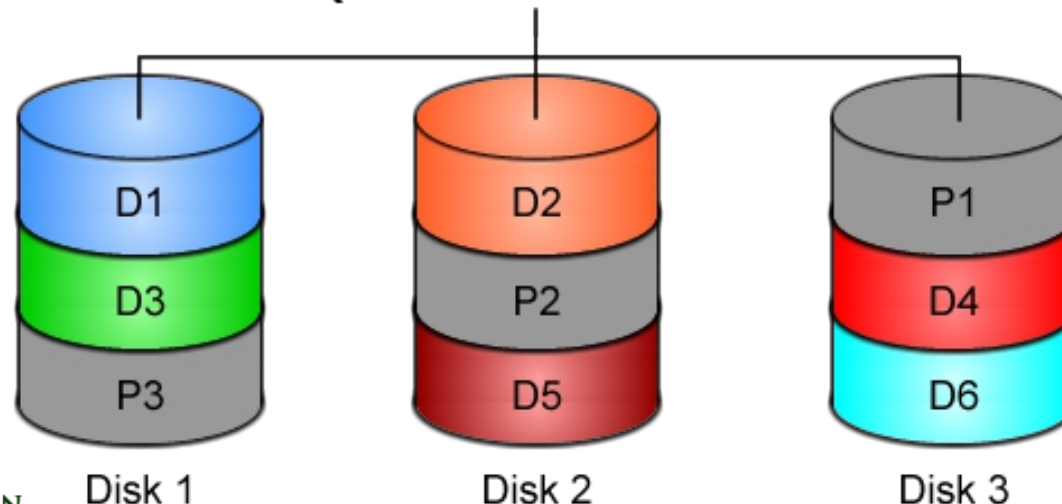

# Beware parity RAID

## Use RAID10 instead

- Striping with mirroring - no parity accesses
- But requires more disks (2 x required storage)
- ZFS an option to consider

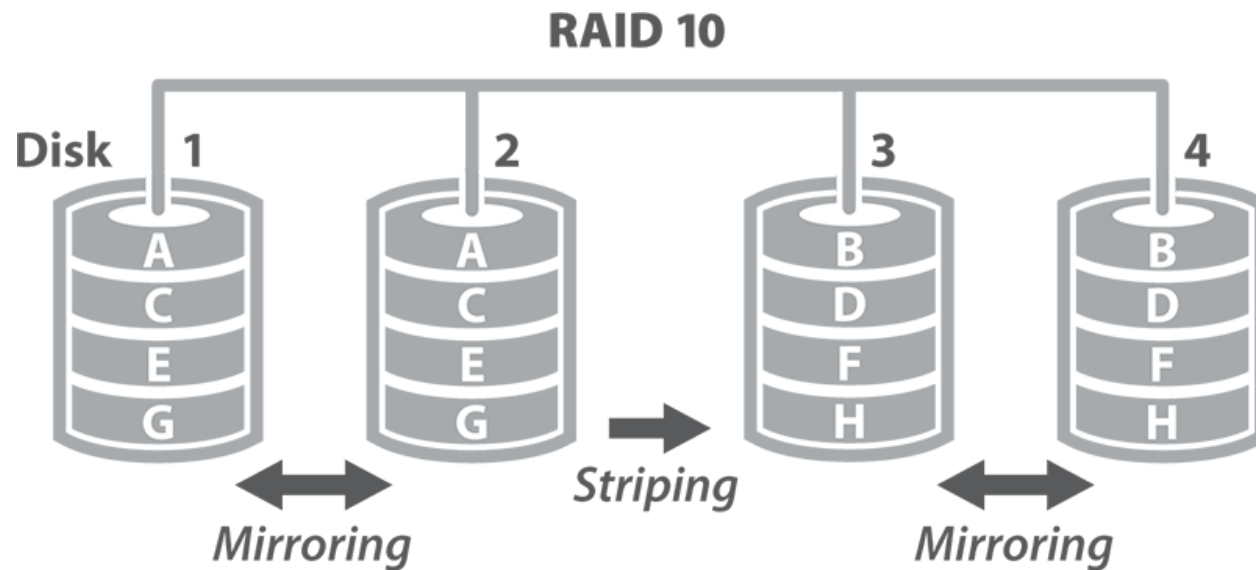

Requires a minimum of four drives

# Network bandwidth

- Some people put their data on remote storage
  - Remote filesystem: e.g. NFS
  - Remote block device: e.g. iSCSI, nbd
- The network can then become a bottleneck
- 1Gbps network = only 100MB/s max
- Use a separate storage NIC
- Tune MTU=9000 ("jumbo frames") on the storage LAN if your NICs/switches support it
- Consider 10G networking

# RAM

- Each guest expects to have a certain amount of RAM to itself, so make sure you have enough RAM in total
- Host swapping to disk is a no-no
- Some clever tweaks possible
  - e.g. Linux ksmd: kernel shared memory daemon
- Far better not to overcommit your RAM in the first place
- RAM is (relatively) cheap, but do use ECC/parity memory for reliability



# Other recommended features

- Multiple NICs are useful
  - e.g. separate management network ,disk transfer network, and service network
  - can also bond for redundancy/load sharing
- Integrated LOM allows you to control the host server remotely (e.g. power on/off)
  - Many manufacturers charge a lot for full remote VGA console access (IP KVM)
  - But many offer a cheaper option with IPMI which allows remote serial port access via ipmitool/ipmiutil
- Consider dual power supplies

# OoB / LOM / IPMI / iDRAC

- **OoB:** Out of Band
  - **LOM:** Lights Out Management
  - **IPMI:** Intelligent Platform Management Interface
  - **iDRAC:** integrated Dell Remote Access Controller
- ...Many other commercial solutions

# Sample Hardware



**DELL** INTEGRATED DELL REMOTE ACCESS CONTROLLER 6 - ENTERPRISE Support | About | Logout

**System**  
PowerEdge R610  
Admin

**System**  
iDRAC Settings  
Batteries  
Fans  
Intrusion  
Power Supplies  
Removable Flash Media  
Temperatures  
Voltages  
Power Monitoring  
LCD

**Properties** Setup Power Logs Alerts Console/Media vFlash Remote File Share

**System Summary** System Details System Inventory

### System Summary

**Server Health**

Status	Component
✓	Batteries
✓	Fans
✓	Intrusion
✓	Power Supplies
✓	Removable Flash Media
✓	Temperatures
✓	Voltages

**Virtual Console Preview**  
Options : Settings


Refresh Launch

**Server Information**

Power State	ON
System Model	PowerEdge R610
System Revision	II

**Quick Launch Tasks**

- Power ON / OFF
- Power Cycle System (cold boot)
- Launch Virtual Console

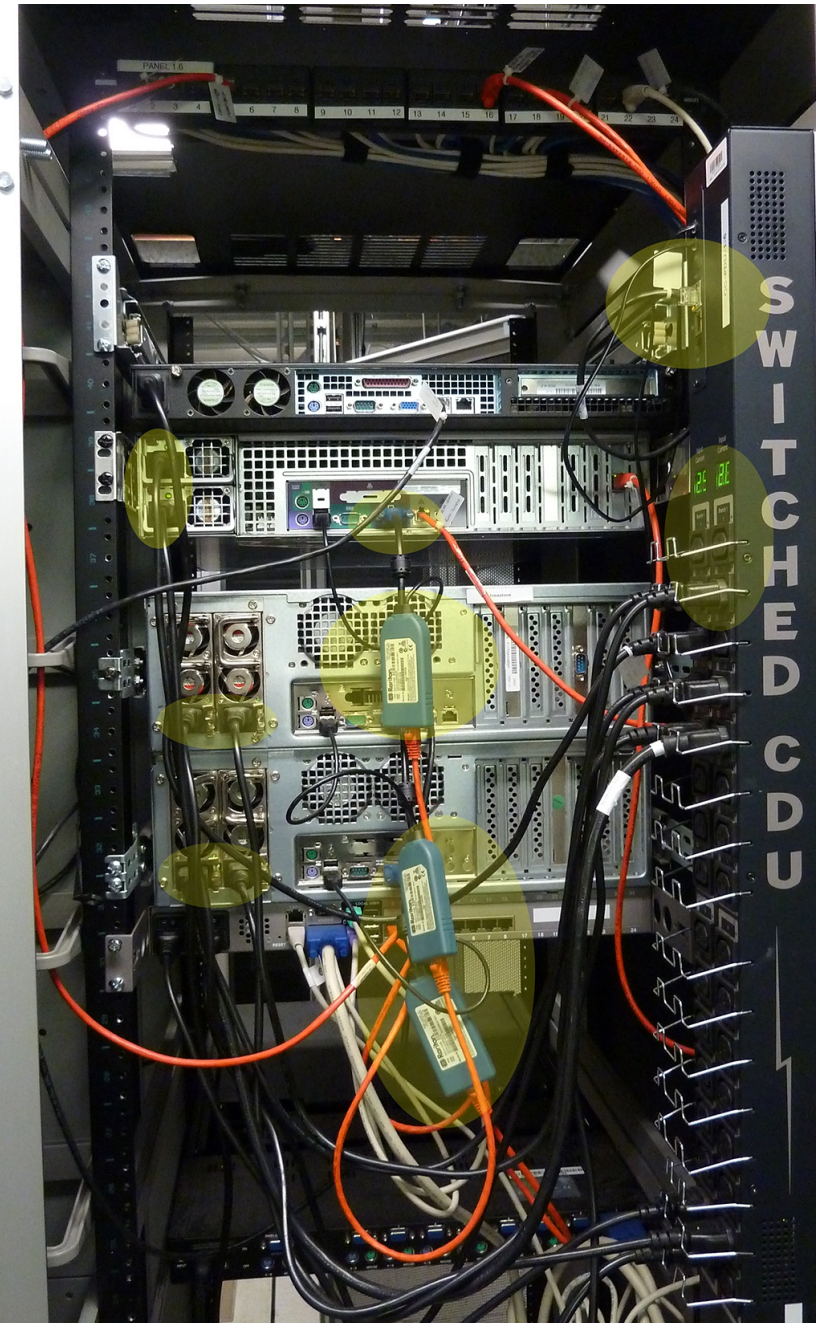

# Summary - choosing hardware

- Choose servers with VT-x or AMD-V support and 64-bit processor
- Buy enough RAM for all your VMs combined
  - and spare DIMM slots for expansion
- Install multiple hard drives
  - but don't use RAID5 or RAID6 for VM images
- Consider integrated or some OoB option
- Install multiple NICs
  - or expansion slots to add them later