


IP Basics

Unix/IP Preparation Course
July 19, 2009
Eugene, Oregon, USA

hervey@nsrc.org

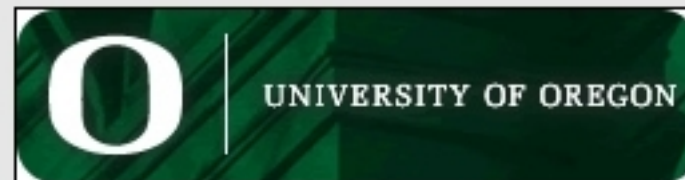

Layers

Complex problems can be solved using the common divide and conquer principle. In this case the internals of the Internet are divided into separate layers.

Makes it easier to understand

Developments in one layer need not require changes in another layer


Easy formation (and quick testing of conformation to) standards

Two main models of layers are used:

OSI (Open Systems Interconnection)

TCP/IP

OSI Model

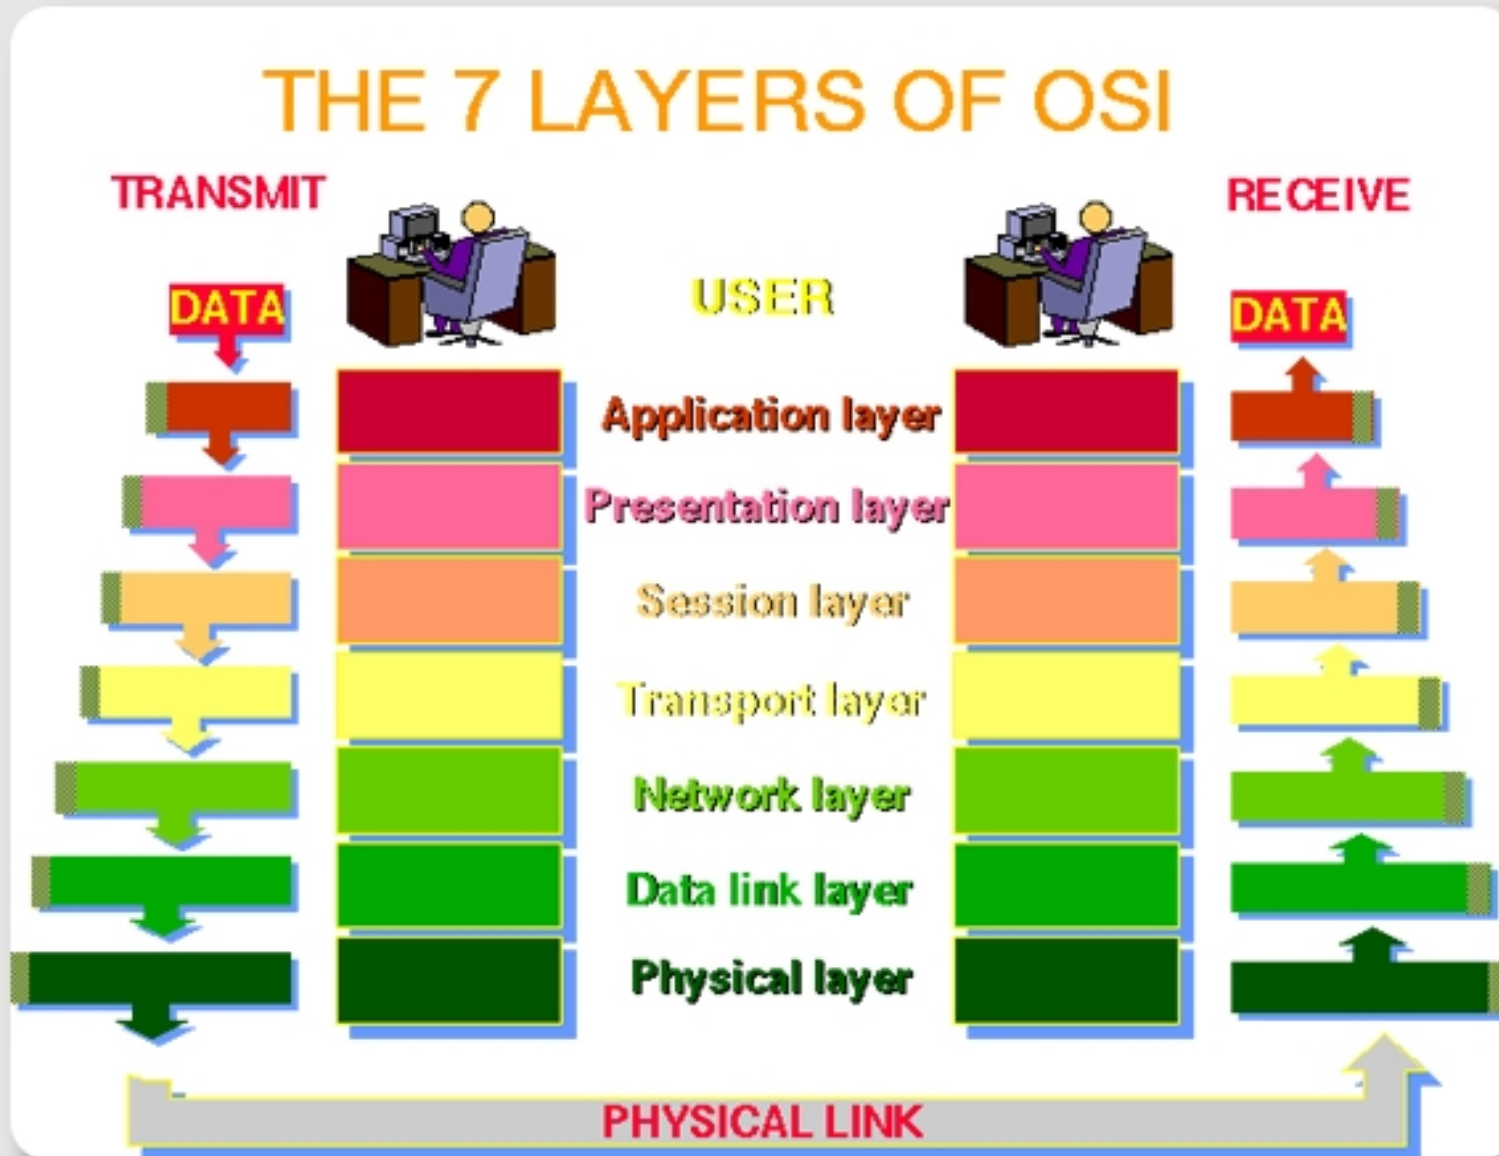

OSI

Conceptual model composed of seven layers, developed by the International Organization for Standardization (ISO) in 1984.

Layer 7 – Application (servers and clients etc web browsers, httpd)

Layer 6 – Presentation (file formats e.g pdf, ASCII, jpeg etc)

Layer 5 – Session (conversation initialisation, termination,)

Layer 4 – Transport (inter host comm – error correction, QOS)

Layer 3 – Network (routing – path determination, IP[x] addresses etc)

Layer 2 – Data link (switching – media acces, MAC addresses etc)

Layer 1 – Physical (signalling – representation of binary digits)

Acronym: All People Seem To Need Data Processing

TCP/IP

Generally, TCP/IP (Transmission Control Protocol/Internet Protocol) is described using three to five functional layers. We have chosen the common DoD reference model, which is also known as the Internet reference model.


Process/Application Layer consists of applications and processes that use the network.

Host-to-host transport layer provides end-to-end data delivery services.


Internetwork layer defines the datagram and handles the routing of data.

Network access layer consists of routines for accessing physical networks.

TCP/IP model – the “hourglass”

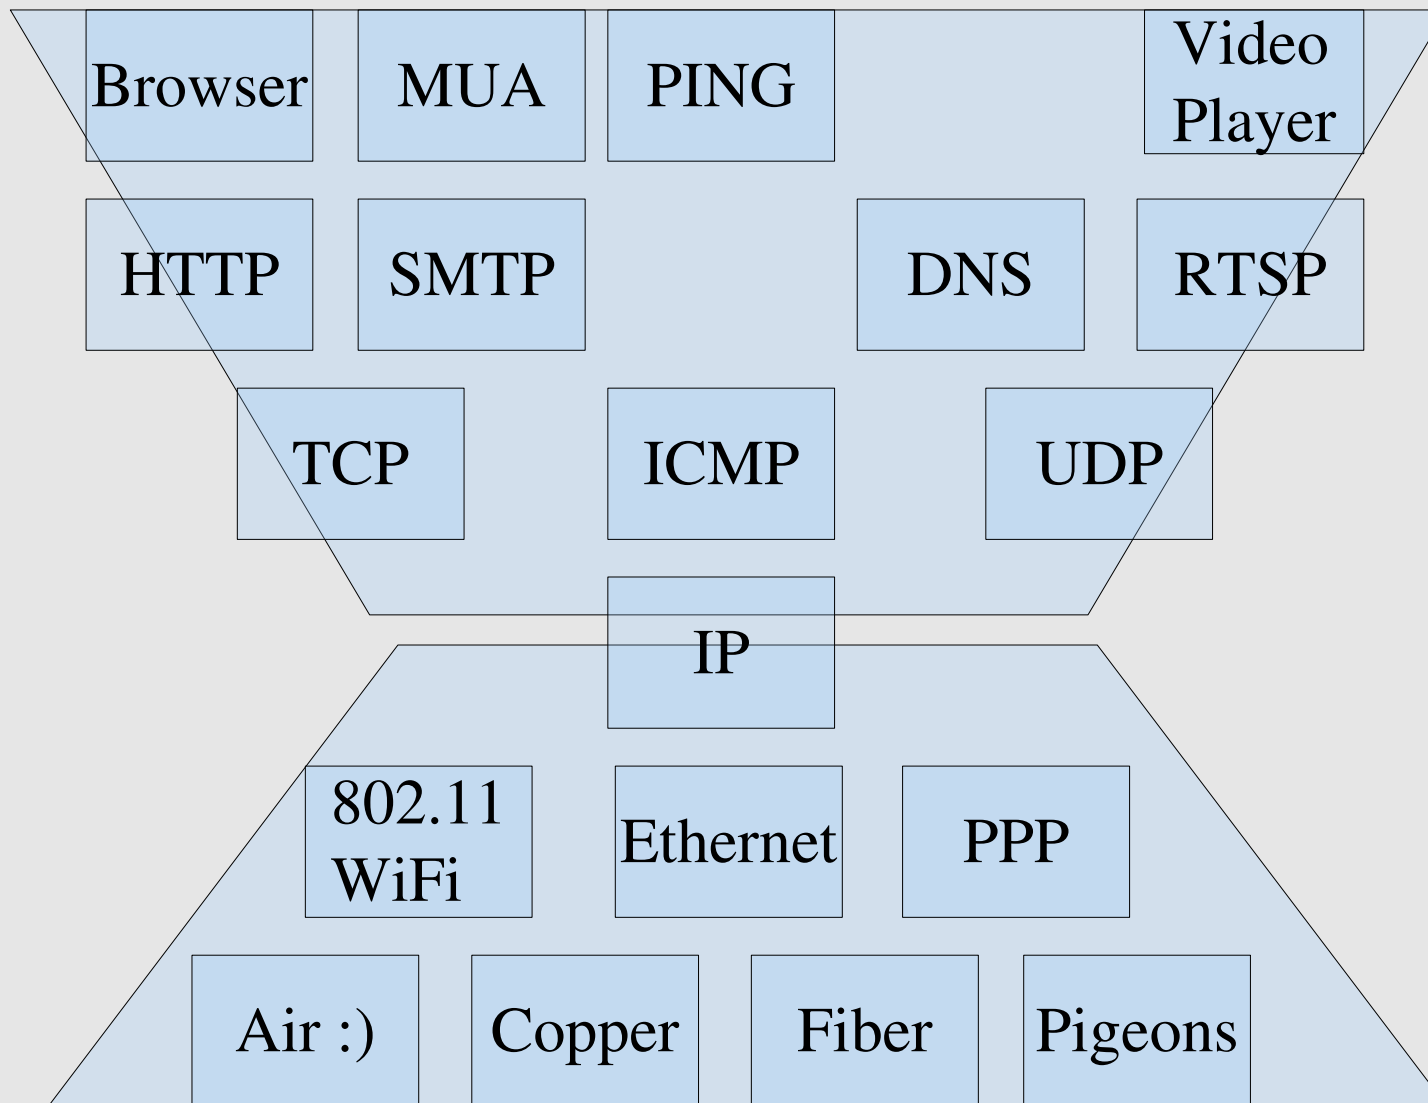


OSI and TCP/IP

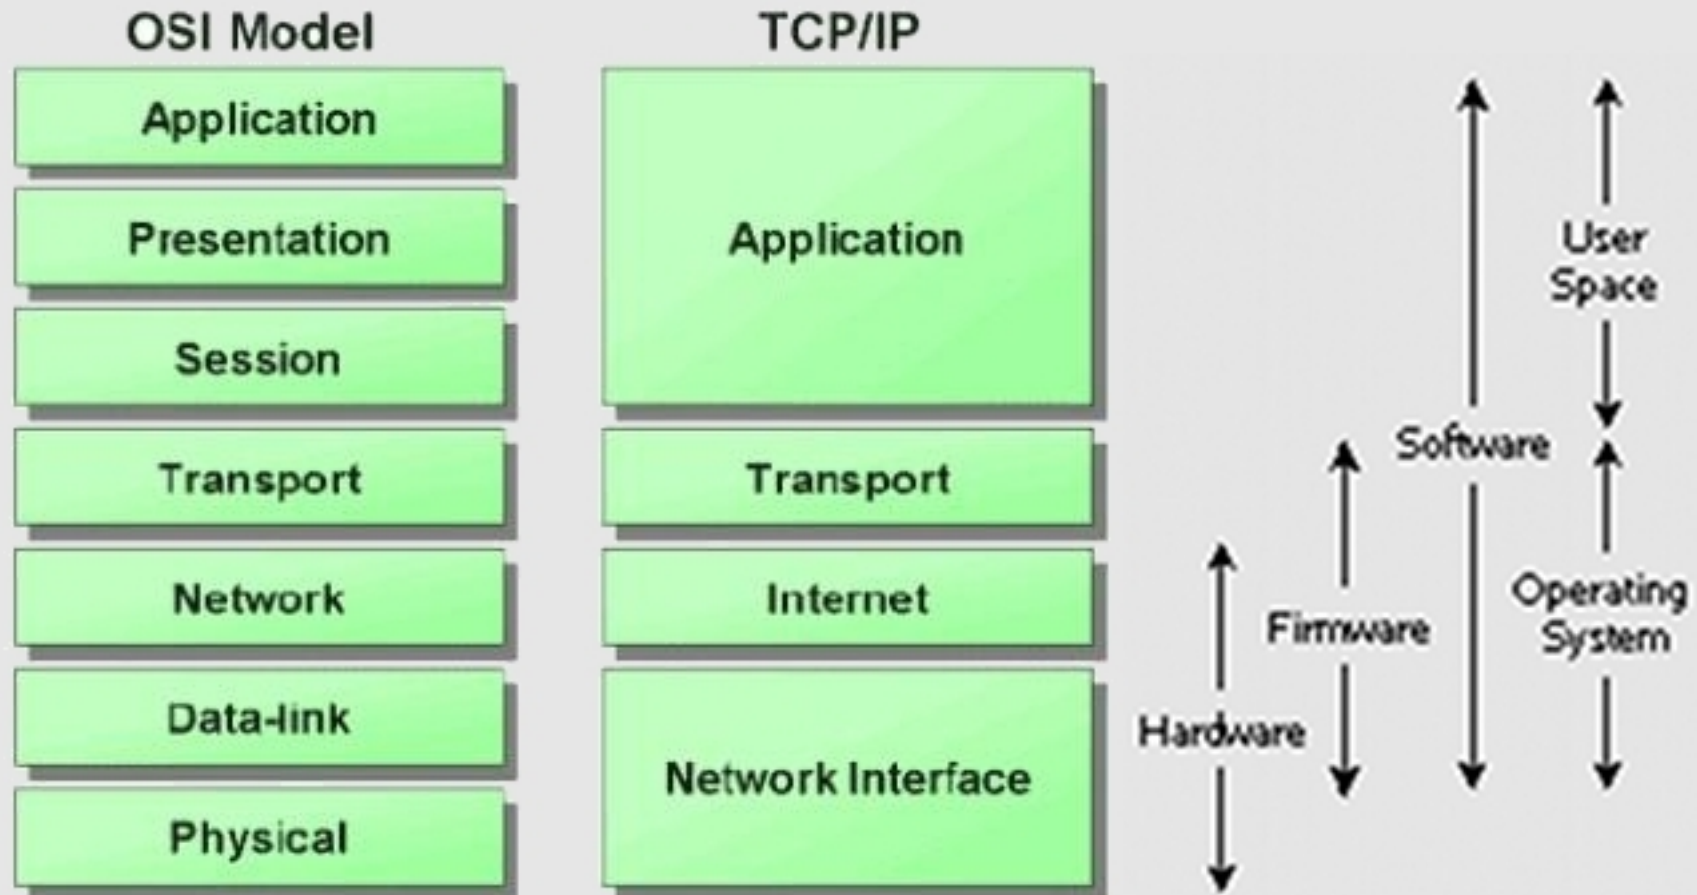

Encapsulation & Decapsulation

Lower layers add headers (and sometimes trailers) to upper layers packets

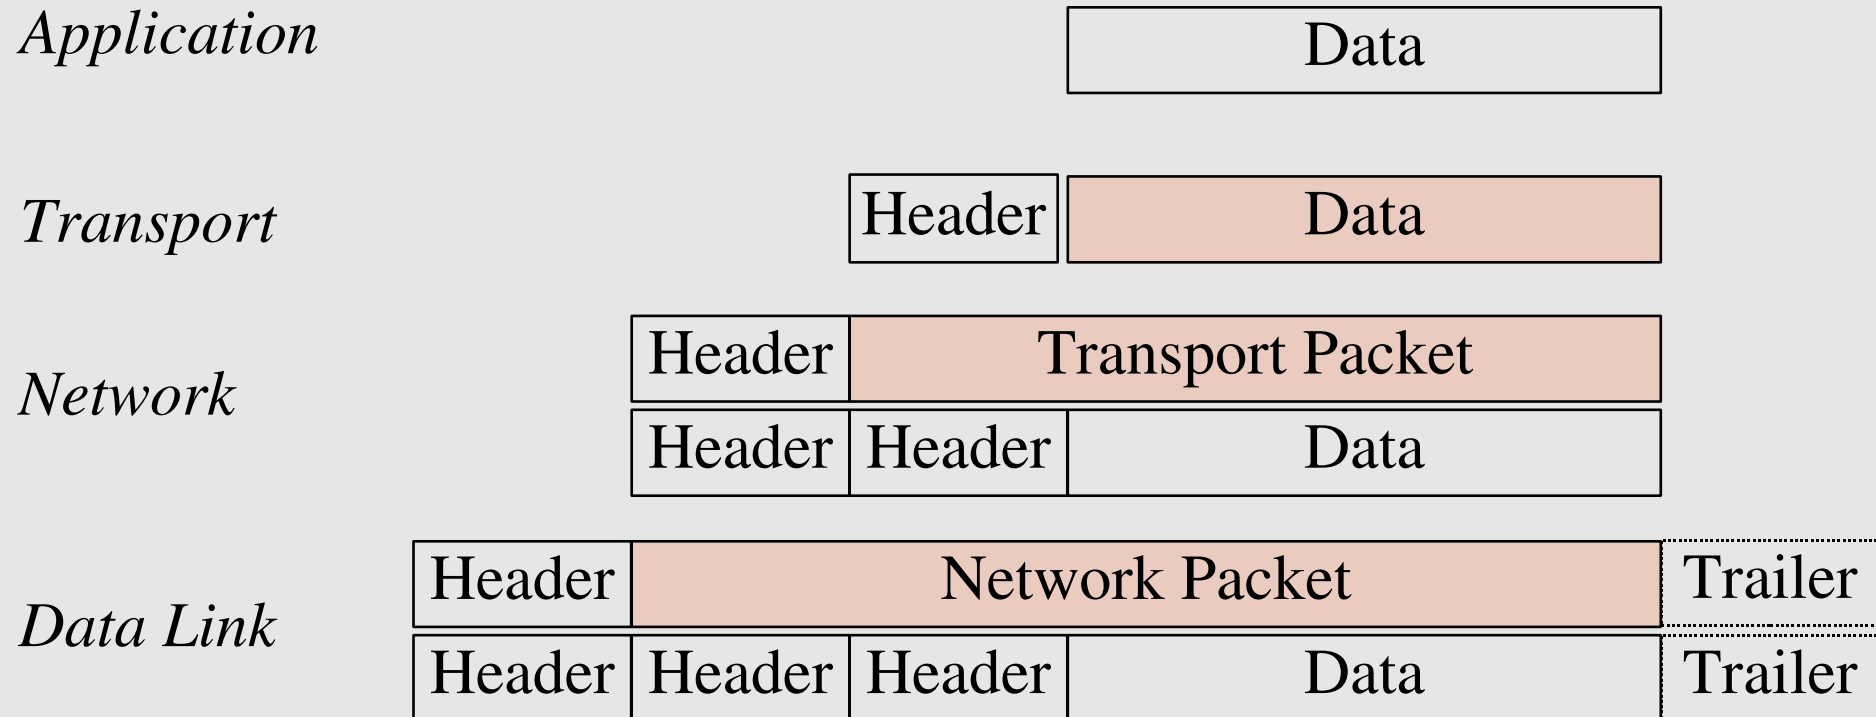

Frame, Datagram, Segment, Packet

Different names for packets at different layers

Ethernet (link layer) frame

IP (network layer) datagram

TCP (transport layer) segment

Terminology is not strictly followed

we often just use the term “packet” at any layer

Summary

Networking is a problem approached in layers.

OSI Layers

TCP/IP Layers

Each layer adds headers to the packet of the previous layer as the data leaves the machine (encapsulation) and the reverse occurs on the receiving host (decapsulation)

So what is an IPv4 address anyway?

32 bit number (4 octet number) can be represented in lots of ways:

133	27	162	125
-----	----	-----	-----

10000101	00011011	10100010	01111101
----------	----------	----------	----------

85	1B	A2	7D
----	----	----	----

More to the structure


Hierarchical Division in IP Address:

Network Part (Prefix)

describes which network

Host Part (Host Address)

describes which host on that network

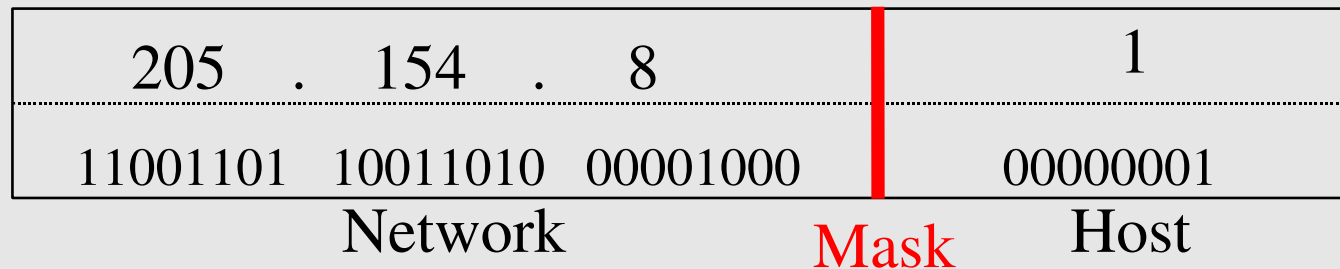

Boundary can be anywhere

used to be a multiple of 8 (/8, /16/, /24), but not usual today

Network Masks

Network Masks help define which bits are used to describe the **Network Part** and which for **hosts**

Different Representations:

decimal dot notation: 255.255.224.0 (128+64+32 in byte 3)

binary: 11111111 11111111 111 00000 00000000

hexadecimal: 0xFFFFE000

number of network bits: /19 (8 + 8 + 3)

Binary AND of 32 bit IP address with 32 bit **netmask** yields network part of address

Sample Netmasks

137.158.128.0/**17** (netmask **255.255.128.0**)

1111 1111		1111 1111		1	0000 0000	0000 0000
1000 1001	1001 1110	1	0000 0000	0000 0000		

198.134.0.0/**16** (netmask **255.255.0.0**)

1111 1111		1111 1111			0000 0000	0000 0000
1100 0110	1000 0110		0000 0000	0000 0000		

205.37.193.128/**26** (netmask **255.255.255.192**)

1111 1111		1111 1111		1111 1111		11	00 0000
1100 1101	0010 0101	1100 0001	10	00 0000			

Allocating IP addresses

The subnet mask is used to define size of a network

E.g a subnet mask of 255.255.255.0 or /24 implies $32-24=8$ host bits

2^8 minus 2 = 254 possible hosts

Similarly a subnet mask of 255.255.255.224 or /27 implies $32-27=5$ host bits

2^5 minus 2 = 30 possible hosts

Special IP Addresses

All 0's in host part: Represents Network

e.g. 193.0.0.0/24

e.g. 138.37.128.0/17

e.g. 192.168.2.128/25 (WHY ?)

All 1's in host part: **Broadcast** (all hosts on net)

e.g. 137.156.255.255 (137.156.0.0/16)


e.g. 134.132.100.255 (134.132.100.0/24)

e.g. 192.168.2.127/25 (192.168.2.0/25) (WHY ?)

127.0.0.0/8: **Loopback** address (127.0.0.1)

0.0.0.0: Various special purposes (DHCP, etc.)

Networks – super- and subnetting

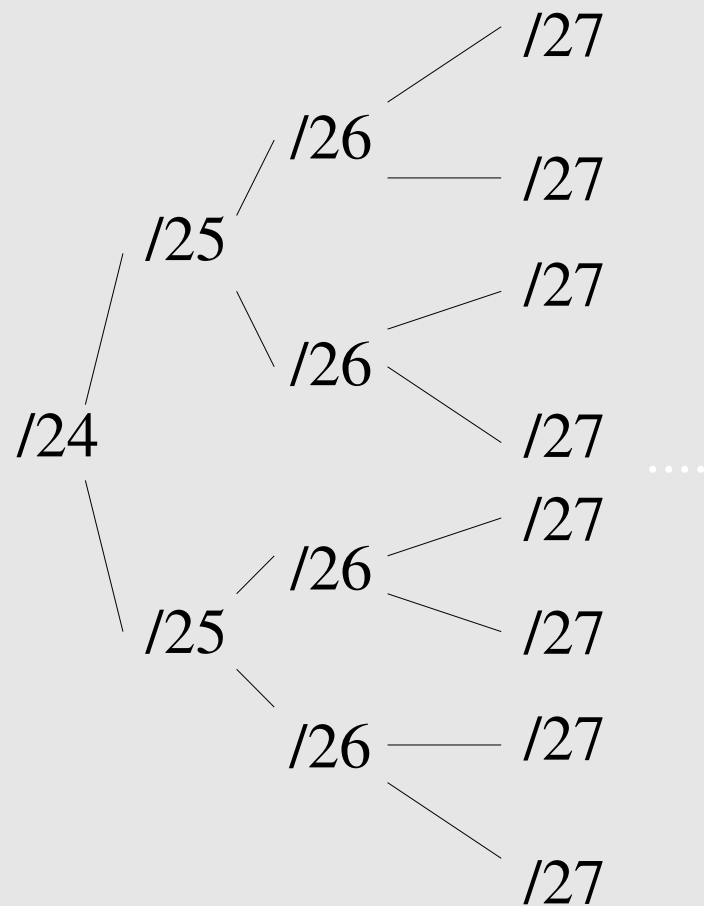

By adding one bit to the netmask, we subdivide the network into two smaller networks. This is *subnetting*.

i.e.: If one has a /26 network ($32 - 26 = 6 \Rightarrow 2^6 \Rightarrow 64$ addresses), that network can be subdivided into two subnets, using a /27 netmask, where the state of the last bit will determine which network we are addressing ($32 - 27 = 5 \Rightarrow 2^5 \Rightarrow 32$ addresses). This can be done recursively ($/27 \Rightarrow 2 \times /28$ or $4 \times /29$, etc...).

Example: 192.168.10.0/25 (.0 - .127) can be subnetted into 192.168.10.0 / 26 and 192.168.10.64 / 26


Networks – super- and subnetting

Inversely, if two networks can be “joined” together under the same netmask, which encompasses both networks, then we are *supernetting*.

Example:

Networks 10.254.4.0/24 and 10.254.5.0/24 can be “joined” together into one network expressed: 10.254.4.0/23.

Note: for this to be possible, the networks must be *contiguous*, i.e. it is not possible to supernet 10.254.5.0/24 and 10.254.6.0/24

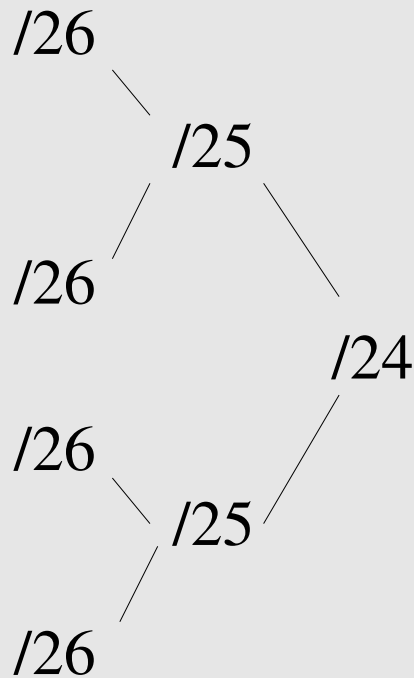

Numbering Rules

Private IP address ranges (RFC 1918)

10/8 (10.0.0.0 – 10.255.255.255)

192.168/16 (192.168.0.0 – 192.168.255.255)

172.16/12 (172.16.0.0 – 172.31.255.255)

Public Address space available from AfriNIC

Choose a small block from whatever range you have, and subnet your networks (to avoid problems with broadcasts, and implement segmentation policies – DMZ, internal, etc...)

Linux IP related settings

Files

```
/etc/network/interfaces  
/etc/hosts  
/etc/hostname    (optional)
```

Commands

```
ifconfig eth0 196.200.218.x/24  
route add default gw 192.200.218.254  
hostname pc1.cs.uoregon.edu
```

Routing

Every host on the internet needs a way to get packets to other hosts outside its local network.

This requires special hosts called **routers** that can move packets between networks.

Packets may pass through many routers before they reach their destinations.

The route table

All hosts (including routers) have a **route table** that specifies which networks it is connected to, and how to forward packets to a gateway router that can talk to other networks.

A simple route table (as might be shown by `route -n`):

Destination	Gateway	Genmask	Flags	Interface
128.223.142.0	0.0.0.0	255.255.254.0	U	eth0
0.0.0.0	128.223.142.1	0.0.0.0	UG	eth0

What do route table entries mean?

Destination	Gateway	Genmask	Flags	Interface
128.223.142.0	0.0.0.0	255.255.254.0	U	eth0
0.0.0.0	128.223.142.1	0.0.0.0	UG	eth0

The **destination** is a network address.

The **gateway** is an IP address of a router that can forward packets (or 0.0.0.0, if the packet doesn't need to be forwarded).

The **genmask** is a netmask.

Flags indicate the type of route.

The **interface** is the network interface that is connected to that network.

How the route table is used

A packet that needs to be sent has a destination IP address.

For each entry in the route table (starting with the first):

Compute the logical AND of the destination IP and the **genmask** entry.

Compare that with the **destination** entry.

If those match, send the packet out the **interface**, and we're done.

If not, move on to the next entry in the table.

Reaching the local network

Suppose we want to send a packet to 128.223.143.42 using this route table.

Destination	Gateway	Genmask	Flags	Interface
128.223.142.0	0.0.0.0	255.255.254.0	U	eth0
0.0.0.0	128.223.142.1	0.0.0.0	UG	eth0

In the first entry:

$128.223.143.42 \text{ AND } 255.255.254.0 = 128.223.142.0$

This matches the **destination** of the first routing table entry, so send the packet out **interface** eth0.

That first entry is called a **network route**.

Reaching other networks

Suppose we want to send a packet to 72.14.213.99 using this route table.

Destination	Gateway	Genmask	Flags	Interface
128.223.142.0	0.0.0.0	255.255.254.0	U	eth0
0.0.0.0	128.223.142.1	0.0.0.0	UG	eth0

$72.14.213.99 \text{ AND } 255.255.254.0 = 72.14.212.0$

This does not match the first entry, so move on to the next entry.

$72.14.213.99 \text{ AND } 0.0.0.0 = 0.0.0.0$

This does match the second entry, so forward the packet to 128.223.142.1 via eth0.

The default route

Note that this route table entry:

Destination	Gateway	Genmask	Flags	Interface
0.0.0.0	128.223.142.1	0.0.0.0	UG	eth0

matches every possible destination IP address. This is called the **default route**. The gateway has to be a router capable of forwarding traffic.

More complex routing

Consider this route table:

Destination	Gateway	Genmask	Flags	Interface
192.168.0.0	0.0.0.0	255.255.255.0	U	eth0
192.168.1.0	0.0.0.0	255.255.255.0	U	eth1
192.168.2.0	0.0.0.0	255.255.254.0	U	eth2
192.168.4.0	0.0.0.0	255.255.252.0	U	eth3
0.0.0.0	192.168.1.1	0.0.0.0	UG	eth0

This is what a router's routing table might look like. Note that there are multiple interfaces for multiple local networks, and a gateway that can reach other networks.

Forwarding packets

Any UNIX-like (and other) operating system can function as gateway:

- In Linux in `/etc/sysctl.conf` set:

```
net.ipv4.ip_forward=1
```

Without forwarding enabled, the box will not forward packets from one interface to another: it is simply a host with multiple interfaces.