

# Selecting Campus Switches and Routers

## Campus Network Design & Operations Workshop



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license  
(<http://creativecommons.org/licenses/by-nc/4.0/>)



UNIVERSITY OF OREGON

Last updated 4<sup>th</sup> August 2024



# Choices!

- Minimum requirements for L2 devices
- Edge Switch
- Distribution Switch
- Campus Core Router
- Campus Border Router
- In all cases examples of mainstream vendor models are given to *guide* campus network administrators

# Selecting Switches

# Selecting Switches

- Minimum features:
  - Standards compliance
  - Encrypted management (SSH/HTTPS)
  - VLAN trunking
  - Spanning Tree (RSTP at least)
  - SNMP
    - At least v2 (v3 has better security)
  - Remote management and configuration backup
    - CLI preferred, also serial console desirable
    - Would also like centralized login authentication via TACACS+ or RADIUS

# Selecting Switches

- Other recommended features:
  - DHCP Snooping
    - Prevent end-users from running a rogue DHCP server
      - Happens a lot with little wireless routers (Netgear, Linksys, etc) plugged in backwards
    - Uplink ports towards the legitimate DHCP server are defined as “trusted”. If DHCPOFFERs are seen coming from any untrusted port, they are dropped.
  - RA Guard
    - Prevent end-users from sending IPv6 Router Advertisements
      - Happens a lot with older Windows devices with IPv6 enabled, building automatic tunnels, and then announcing themselves as routers to the LAN

# Selecting Edge Switches

- In addition to the previous general features:
  - L2 device only – connecting end users!
  - 24 or 48 1Gbps copper ports
    - Opt for some Power over Ethernet (POE) ports if requirement to connect wireless access points and/or IP phones
  - Two 1Gbps/10Gbps uplink ports (copper or fibre)
- Only connects to the building distribution switch
  - 1Gbps uplink may be a bottleneck, 10Gbps is better
  - Fibre installation allows future growth to 10Gbps from edge to distribution by swapping SFP for SFP+

# Example Low-Cost Edge Switch

- D-Link DGS-1510 series
  - Console, SSH, very Cisco-like CLI
  - SNMPv2/v3, DHCP inspection ...
  - 2x10G SFP+ and 2x1G SFP
    - "X"/"XMP" models have 4x10G SFP+
  - 24 or 48 1G copper ports
    - "P"/"XMP" models have PoE
- DGS-1210 even cheaper
  - No console port (sold as "web managed" but still has SSH)



# Example Edge Switch

- Cisco Catalyst 1000
  - 24 or 48 10/100/1000 copper ports
    - PoE options if desired
  - Uplink options
    - 4x 1Gbps SFP or 4x 10Gbps SFP+
  - Picture shows the C1000-48T-4X-L




# Selecting Distribution Switches

- In addition to the previous general features:
  - L2 device only – connecting edge switches!
  - 1 or 2 10Gbps fibre uplink ports
  - 12 or 24 copper or fibre ports
- Aggregates edge switches towards the core
  - Fibre ports for uplink
  - Sufficient copper and/or fibre ports for edge aggregation
  - May also connect end users on copper

# Example Distribution Switches

- Cisco Catalyst 1000
  - 24 10/100/1000 copper ports
  - Uplink with 4x 1Gbps SFP or 4x 10Gbps SFP+
- Cisco Catalyst 9300 (1G fibre) or 9300X (10G fibre)
  - 24 fibre ports (C9300-24S or C9300X-24Y)
  - 48 fibre ports (C9300-48S or C9300X-48Y)
  - Uplink modules range from 4x 1G (C9300) to 4x 100G (C9300X)

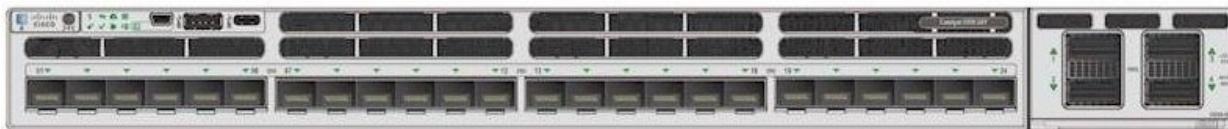

# Summary

- Edge Switch
  - Focus on access ports
  - Fibre to building distribution, or is copper enough?
  - Do NOT need any L3 capability
- Distribution Switch
  - Fibre ports to connect Edge Switches
  - 10Gbps fibre link to Campus Core Router
    - Newer switches support 25Gbps with the same form factor SFP+
  - Do NOT need any L3 capability

# Choosing a Core Router


# Core router: essential features

- Lots of fiber ports
  - SFP (1G) or SFP+ (10G)
- Robust, line-rate routing (layer 3 forwarding)
  - IPv4 and IPv6, static routes
- Sufficient ARP (IPv4) and NDP (IPv6) entries
- DHCP relay (DHCP helper)
- Management: SSH, SNMPv2/v3
- OSPF (v2 and v3) or IS-IS

# Core router: optional features

- HSRP/VRRP
- Mirror/span port
- Hardware redundancy (e.g. dual PSU)
  - But would you be better buying a whole second device?

# One super-redundant device

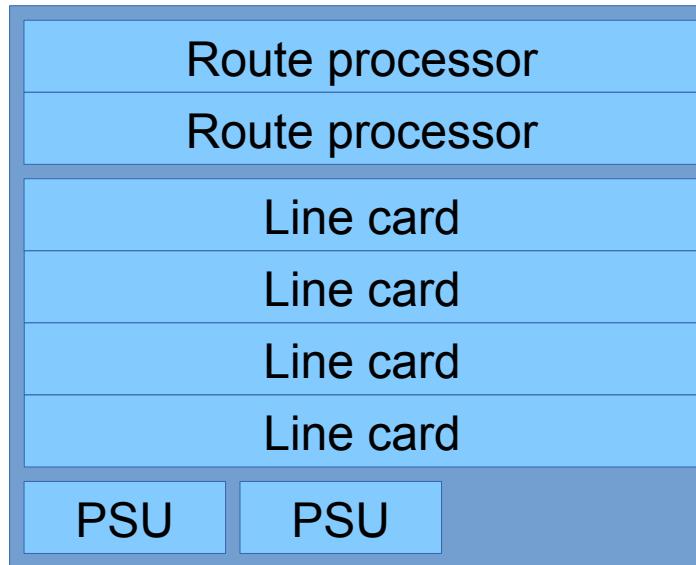

- Chassis failures are not unknown ■■
- What would you do if that happened?

# Two less-redundant devices




- Running “live-live” so everything is tested
- In emergency, can move key users to other side
- Key buildings can be dual-homed
  - This is where OSPF and HSRP/VRRP come in

# Don't spend too much!

- Many “edge” L3 switches make fine campus core routers
- You won’t be carrying a full routing table
  - So a limit of say 16K routes isn’t a problem
  - Check how many IP interfaces/VLANs it supports
- Whatever you buy today will be obsolete in 3-5 years anyway
- If it’s cheap you can afford two

# Cisco Nexus C36180YC

- 48 SFP/SFP+/SFP28 ports
  - Each port supports 1G/10G/25G ethernet
- 6x 40G/100G uplink ports
  - Will also operate as 4x25G or 4x10G with breakout cable
- Runs NX-OS
  - Very IOS like, but not the same
  - LAN Enterprise license needed for L3 routing protocols

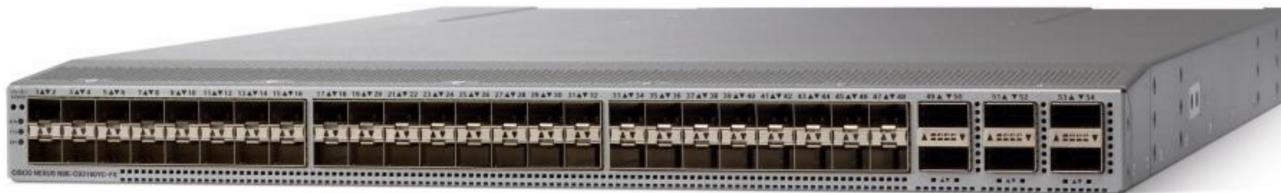

# Cisco Catalyst 9500-48Y4C

- 48 SFP/SFP+/SFP28 ports
  - Each port supports 1G/10G/25G ethernet
- 4x 40G/100G uplink ports
  - Check transceiver/DAC/AOC support
- Needs “Network Advantage” license for BGP/OSPF/IS-IS
  - Beware: Cisco 3/5/7-year license for “DNA Advantage” for L3 feature set



# Juniper EX4650

- 48 SFP/SFP+/SFP28 ports
  - Each port supports 1G/10G/25G ethernet
- 8x 40G/100G uplink ports
  - Will also operate as 4x25G or 4x10G with breakout cable
- Premium Feature License needed for BGP and IS-IS support
  - Base Feature license has OSPF and RIPv2



UNIVERSITY OF OREGON

# Juniper QFX5120-48Y

- 48 SFP/SFP+/SFP28 ports
  - Each port supports 1G/10G/25G ethernet
- 8x 40G/100G uplink ports
  - Will also operate as 4x25G or 4x10G with breakout cable
- Advanced 1 Feature License needed for OSPF/IS-IS/BGP support
  - Beware: 3/5-year license for Software Feature Licenses



# Not big enough?!

- Above this you are looking at chassis switches
- Examples:
  - Cisco Catalyst 9600, Nexus 9000
  - Juniper EX9204/08/14, QFX10000



- But do you need anything this big and power hungry??

# Maybe you already have one!

- Check the features of your existing devices
  - And check on forums for experiences of people using the same device for routing
- May need to enable it: “ip routing” or similar
- May need to update to latest stable firmware
- Test with a spare device if you have one

# Choosing a Border Router

# Border router: essential features

- Robust, line-rate routing (layer 3 forwarding)
  - IPv4 and IPv6, static routes
- Powerful CPU, Large Memory
- Management: SSH, SNMP, netflow/jflow/sflow/IPFIX
- OSPF (v2 and v3) or IS-IS
- NAT (if using internal private IPv4 address space)
- Hardware redundancy (e.g. dual PSU)
  - but would you be better buying a whole second device?

# Border router: optional features


- If Multihoming:
  - Full support for BGP
  - Ability to carry full BGP table (if needed)
  - Support of all BGP Attributes, implementing BGP policies

# Sizing a Border Router

- Consider connection to upstream provider
  - Allow for headroom far greater than link capacity
  - Bandwidth upgrades needed
  - Traffic growths larger than expectation
  - Dealing with Denial-of-Service Attacks from outside
- Physical chassis size is irrelevant
  - Smaller the better, reduced power and space requirements
- Border router needs:
  - Internal interface (to network core)
  - External interface(s) (to upstream provider(s))
  - 1 Rack Unit is usually enough

# Typical Low-Cost Example

- MikroTik CCR2116-12G-4S+
  - 13 Gigabit Ethernet ports (copper)
  - 4 SFP/SFP+ ports
  - Real world throughput well in excess of 1Gbps
  - Only runs RouterOS v7, no "long term stable" release made yet
  - Some IPv6 issues, may have been improved in v7

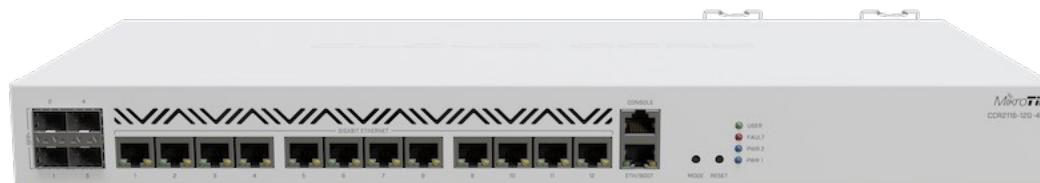

# Typical Mid-Cost Example

- Cisco 1161-8P
  - 8 Gigabit Ethernet LAN ports (copper)
  - 2 WAN ports (1 Copper/SFP)
  - Real world throughput around 1.8Gbps (IMIX)
  - Handles up to 800k routes (IPv4/IPv6)



# Typical Mid-Range Example

- Cisco ASR1001-X
  - 1 RU chassis
  - 2x10GE and 6x1GE interfaces
  - 2.5Gbps throughput default
  - License activates 10GE ports allowing up to 20Gbps
- Cisco C8300-1N1S-4T2X
  - 1 RU chassis
  - 2x10GE and 4x1GE interfaces
  - Up to 6Gbps throughput (IMIX)



# Typical High-End Examples

- Juniper MX204
  - Popular high-end border router
  - 4 built-in 100GE and 8 10GE interfaces
  - Throughput up to 400Gbps



- Cisco NCS540X-16Z4G8Q2C
  - 2 built-in 40/100GE, 8 10/25GE and 16 1/10GE interfaces
  - Throughput up to 300Mpps



# Summary

- Core Router
  - Focus on scalability, sufficient CPU to ensure current and immediate future needs
  - Router or “L3 Switch” is often appropriate, as routing needs in the Core are not onerous
- Border Router
  - Physical size unimportant → small!
  - Needs v few interfaces
  - Needs big CPU to handle border functions
  - Consider future BGP needs

# Questions?