# **DNS Operations**

Advanced DNS Operations & Security



### Goals

- Go beyond basic DNS administration, focus on service stability
- Identify common operational problems that plague authoritative nameserver administrators
- Identify pitfalls and errors to avoid when changing zones
- Define proper architectures
- Improve availability and reduce the chance of a breakdown of service using active monitoring

### **Overview**

- Tools
  - using dig and interpreting the results
  - doc, dnstop
- Gotchas and common debugging problems
  - RFC1912, 2182, 2870
  - delegation and glue, keeping it up to date
  - inconsistent delegation between parent and child
  - cache effects
  - TTL policy

### **Overview**

- Operations
  - logging using BIND channels
  - monitoring services and zone exports
  - active delegation checking
  - distributed hosting considerations
  - scripting and automation

- dig is the domain information groper.
- dig is used to query nameservers for information, usually for debugging purposes.
- dig gives you information, and can perfom queries, that most other tools usually used (nslookup, host) don't give you
- dig's output can be confusing the first time one sees it...

```
$ dig ns nsrc.org.
; <<>> DiG 9.4.1-P1 <<>> ns nsrc.org
;; global options: printcmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 40659
;; flags: qr rd ra; QUERY: 1, ANSWER: 2, AUTHORITY: 0, ADDITIONAL: 2
;; QUESTION SECTION:
                        NS
;nsrc.org.
                   IN
;; ANSWER SECTION:
nsrc.org.
               132391
                             NS ARIZONA.EDU.
                        IN
              132391
                             NS RIP.PSG.COM.
nsrc.org.
                        IN
;; ADDITIONAL SECTION:
ARIZONA.EDU.
                    104458
                                      128.196.128.233
                             IN
                                  Α
                                      147.28.0.39
RIP.PSG.COM.
                    89057
                             IN
                                 Α
;; Query time: 60 msec
;; SERVER: 212.38.128.2#53( 212.38.128.2)
;; WHEN: Tue Nov 27 02:58:37 2007
;; MSG SIZE rcvd: 108
```

- Pay particular attention to the flags and the answer section
- Use dig at the authority of the parent and child zones to control proper delegation
- Do the informations match ?

dig ns eu.org.

```
;; ANSWER SECTION:
                                    ns0.pasteur.fr.
eu.org.
                  23772
                           IN
                               NS
                  23772
eu.org.
                           TN
                               NS
                                   ns.eu.org.
                                   ns-slave.free.org.
eu.org.
                  23772
                           IN
                               NS
eu.org.
                 23772
                               NS
                                   dns3.gandi.net.
                           TN
                                   auth1.dns.elm.net.
                 23772
                           TN
eu.org.
                               NS
                  23772
                                   relay-1.ftel.co.uk.
eu.org.
                           IN
                               NS
                  23772
                           IN
                                   ns1.pasteur.fr.
eu.org.
                               NS
```

 Ask one of the servers for the NS records for cctld.eu.org

dig @ns.eu.org NS cctld.eu.org.

```
;; AUTHORITY SECTION:
cctld.eu.org.
                    259200
                                 NS
                                     NS1.CATPIPE.NET.
                             TN
               259200
cctld.eu.org.
                                 NS
                                     NS2 CATPIPE NET.
                             TN
cctld.eu.org.
               259200
                                     NS1.cctld.eu.org.
                                 NS
                             IN
```

- Notice the flags for the query, and the way the answers are presented
- Control that the servers for cctld.eu.org return the same information:

```
dig @ns1.cctld.eu.org NS cctld.eu.org. dig @x0.dk NS cctld.eu.org.
```

• What do you notice ?

#### Tools - doc

- Checking delegations manually is errorprone and tiresome
- A tool to automatize this particular check exists: doc
- Doc can be installed as a port/package
- Usage:

```
doc [-p] domain.name
```

#### Tools – doc

• Try using doc — it should be installed.

```
doc -p cctld.eu.org
```

# Gotchas and common debugging problems

- Logging is the single most useful tool for troubleshooting a running nameserver — we'll see later how to set it up
- Check out RFC1912, 2182 and 2870
- Lame delegations and glue problems can be easy to overlook if the wrong tools are used
- Caching makes this more complicated problems might appear later.
- Pick a reasonable TTL policy

# Gotchas and common debugging problems: caching

- Cache effects
  - Changes can take a while to propagate plan accordingly
- TTL and SOA policy
  - RIPE has a document for recommended SOA values:

ftp://ftp.ripe.net/ripe/docs/ripe-203.pdf

```
example.com. 3600 SOA dns.example.com. admin.example.com. (
1999022301 ; serial YYYYMMDDnn
86400 ; refresh ( 24 hours)
7200 ; retry ( 2 hours)
3600000 ; expire (1000 hours)
3600 ) ; neg ttl ( 2 days)
```

# Gotchas and common debugging problems: caching

- It's common to misinterpret/forget the negative value of the SOA
- "negative" means "how long can remember that the record for this query does NOT exist"

### **Operations**

- remember to turn off recursion!
- logging
- monitoring service (availability and data)
- active delegation checking
- hosting and architecture considerations

## Logging

- Using BIND channels, categories and severities (chap 7.5 of DNS & Bind)
  - The idea is to define channels (file, syslog, ...) and the assign categories to these channels:

```
logging {
   channel transfers {
      file "log/transfers" versions 5 size 100M;
      print-time yes;
   };
   category xfer-out {
      transfers;
   };
   category default {
      default_syslog;
      default_debug;
   };
};
```

## Logging

- Categories of interest:
  - default
    - a good set of defaults send it to your syslog
  - lame-servers
    - bad delegation
  - load
    - zone loading events
  - notify
    - zone change notifications
  - queries
    - logging of queries can be huge!
  - response-checks
    - badly formed answerd, additional information, ...
  - xfer-in / xfer-out
    - events for incoming / outgoing zone transfers

# Logging

 Add logging to /etc/namedb/named.conf, and restart named

```
# rndc reconfig
```

 Do a zone transfer for a zone from one of your neighbors:

```
# dig @ns.of.neighbor axfr zone.name
```

Look at /etc/namedb/log/transfers

# more /etc/namedb/log/transfers

# **Monitoring - services**

- Monitoring services why ?
  - make sure that your nameserver is answering correct data, in a timely manner
  - monitor secondaries
  - monitor infrastructure to deliver DNS service (network, servers, ...)
- Tools useful for monitoring:
  - echoping check service latency and availability
  - SmokePing graph of reponse times
  - Nagios service and server monitoring
  - ... many others

# Monitoring – zone exports


- Monitoring zone export why ?
  - Avoid publishing incorrect information
  - Avoid publishing incomplete information (truncated zone)
  - Avoid disappearance of your zone! (undetected errors + expire of zone)
- Checks
  - zone change controls before AND after publication
     named-checkzone
  - use EOD markers (data that your export script adds to the zone at the end of your zone export job
    · zonevalid
    - "exported at 20071126 09:54" TXT

# Monitoring – zone exports

- Undetected errors
  - zone fails to load (invalid syntax or inconsistent — CNAME and other data for example)
  - no one notices
  - 2-4 weeks later, the zone expires on the secondaries
  - the zone has disappeared
  - difficult to correlate the problem with the exact cause (unless one has logs)
- Note that if "rndc reload" is used, BIND will keep the old zone in memory if the new one fails validation

# Monitoring - baseline

- Get to know your system
- Using tools such as dnstop, tcpdump, MRTG, establish a baseline for your platform when it is functioning normally
- Identify
   ■average queries per second
   ■memory usage for named

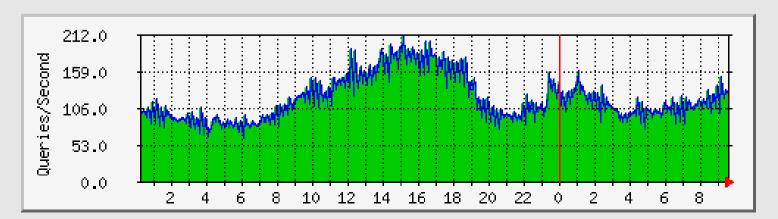

# Monitoring - baseline

 Useful for capacity planning for future growth, and for handling attacks

# **Delegation checking**

- Mostly a policy decision
- Proactive or reactive ?
  - check regularly every delegation
  - or check only when delegation changes
- But there are advantages
  - avoid to field problem reports that are Not Your Problem ("domain XYZ doesn't work!")
- Some TLDs have a "Name server registration" procedure.

# Secondary considerations

- If you're not already doing it, then make sure your SOA server is a hidden master, not accessible from the rest of the network
- None of your public servers should serve any data that is unique/irreplaceable.
- Normally, all public servers are secondaries (but there are other methods, including secure copy)

# Scripting and automation

- You should be try and be familiar with at least one scripting language (Shell, Perl, Python, ...)
- Automate as much as you can
- Run tools like doc, dig to control delegations for critical zones

# **Questions?**

